

TEADIT TF 1570

Description:

TEADIT TF 1570 is a structured PTFE - Gasket - Sheet manufactured by a unique process which provides a high level of fibrillation to overcome the creep relaxation and cold flow problems associated with normal (skived or moulded) PTFE sheets. TEADIT TF 1570 is produced from virgin PTFE resin filled with hollow glass micro spheres.

Advantages:


- TEADIT TF 1570 is suitable for service with a wide variety of aggressive fluids, including hydrocarbons, acids and caustics, solvents, water, steam, hydrogen-peroxide, refrigerants, etc.
- The high compressibility of TEADIT TF 1570 makes it particularly suitable for use with stress sensitive and/or fragile flanged joints, e.g. glass, ceramics, plastic, etc.
- The excellent malleability of TEADIT TF 1570 makes repairing of small damages and/or irregularities of the sealing area (flange surface) unnecessary.
- TEADIT TF 1570 is quick and simple to install. The used gasket can be removed easily and without residue.

Approvals:

- TA Luft
- Blow-Out-Test VDI 2200
- FDA
- Germanischer Lloyd Approval
- BAM

P x T diagramm:


The P x T diagram above indicates the service limits considering the simultaneous influence of pressure and temperature (chemical suitability assumed). The green area represents the normal service limits, while the orange coloured area shows the maximum application limits.

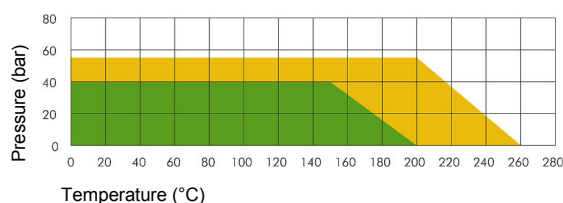

TEADIT INTERNATIONAL
 Rosenheimer Str. 10
 6330 Kufstein
 Tel.: +43-5372-64020-0
 Fax: +43-5372-64020-20
 austria@teadit.eu

TEADIT DEUTSCHLAND GmbH
 Chemiepark G7/Raum 220
 51368 Leverkusen
 Tel.: +49-214-3023879
 Fax.: +49-214-3023893
 germany@teadit.eu


TEADIT ITALIA S.p.A.
 Via Vanzago 13
 25030 Paratico (BS)
 Tel.: +39-035-924911
 Fax: +39-035-913060
 italy@teadit.eu

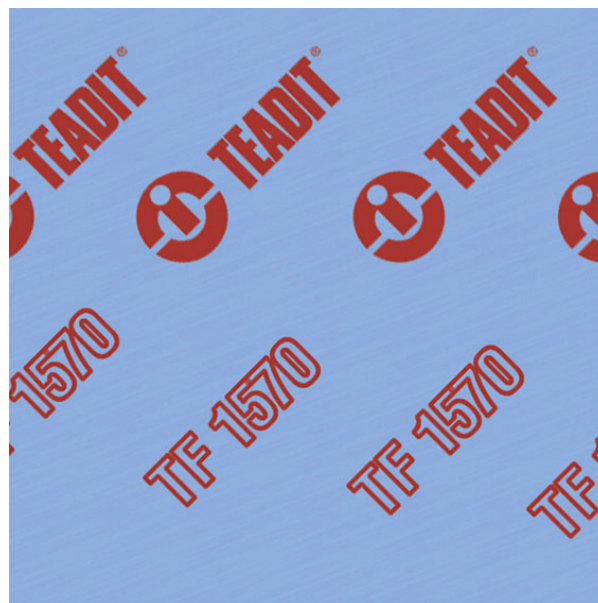

Properties:

- Colour: blue
- Size: Sheets of 1500 mm x 1500 mm in 1.5 mm, 2.0 mm and 3.0 mm thickness
- Temperature: -210°C to +260°C
- Chemical resistance: chemically inert against all substances (pH 0-14), including the most aggressive acids and lyes. It is not recommended for strong caustic service above 80°C. It must not be used in contact with molten alkali metals and elemental fluorine at high temperatures and pressures.
- Operating Pressure: 55 bar
- Ageing: TEADIT TF 1570 is not subject to ageing or weathering. It can be stored indefinitely.


NO WAY THROUGH

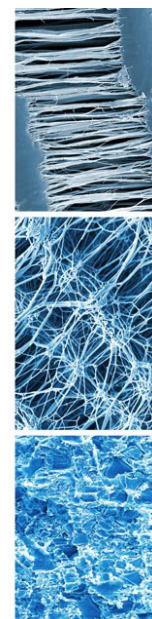

TEADIT TF 1570

TEADIT TF 1570				
property		test method	nominal value	parameters
density	[g/cm ³]	ASTM D 792	1.7	
compressibility	[%]	ASTM F 36	35	$\sigma = 34 \text{ MPa}$
recovery	[%]	ASTM F 36	30	$\sigma = 34 \text{ MPa}$
compressibility ϵ KSW	[%]	DIN 28090 - 2	29	$\sigma = 20 \text{ MPa}$
recovery ϵ KSW	[%]	DIN 28090 - 2	7.4	$\sigma = 20 \text{ MPa}$
tensile strength	[MPa]	ASTM 152	14	room temperature
creep deformation	[%]	ASTM F38	40	
stress retention	[MPa]	DIN 52913	12	30 N/mm ² ,150°C,16h
sealability	[ml/h]	ASTM F 37	0.12	0.7 bar
Q min 0,01	[MPa]	EN 13555	< 10	HE 40 bar
Q smin 0,01	[MPa]	EN 13555	< 10	HE 40 bar
Q min 0,001	[MPa]	EN 13555	16	HE 40 bar
Q smin 0,001	[MPa]	EN 13555	< 10	HE 40 bar
Q crit		EN 13555	> 240	room temperature
Q smax		EN 13555	> 240	room temperature
sealability	[mg / s • m]	DIN 3535	< 0.015	N ₂ , 40 bar, 32 MPa
specific leakage rate L	[mbar • l / (s • m)]	VDI 2440 / TA LUFT	$3.7 \cdot 10^{-6}$	He,1 bar, 30 MPa

NO WAY THROUGH

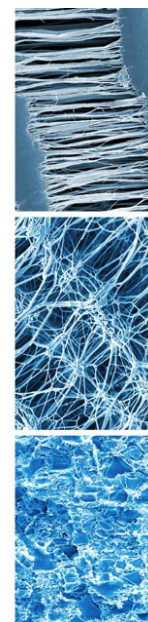

TEADIT INTERNATIONAL
 Rosenheimer Str. 10
 6330 Kufstein
 Tel.: +43-5372-64020-0
 Fax: +43-5372-64020-20
 austria@teadit.eu

TEADIT DEUTSCHLAND GmbH
 Chemiepark G7/Raum 220
 51368 Leverkusen
 Tel.: +49-214-3023879
 Fax.: +49-214-3023893
 germany@teadit.eu

TEADIT ITALIA S.p.A.
 Via Vanzago 13
 25030 Paratico (BS)
 Tel.: +39-035-924911
 Fax: +39-035-913060
 italy@teadit.eu

Since all properties, specifications and application parameters shown throughout this catalogue are approximate and may be mutually influenced, your specific application should not be undertaken without independent study and evaluation for suitability. All technical data and advice given is based on experiences TEADIT® has made so far. Failure to select proper sealing products can result in damage and/or personal injury. Properties, specifications and application parameters are subject to change without notice. TEADIT® does not undertake any liability of any kind whatsoever.