

NA-jointing-sheet TEADIT NA-1005

Construction:

TEADIT style NA-1005 is a compressed non-asbestos jointing-sheet material produced from Aramid fibres, bonded with Nitrile Rubber (NBR). It is being manufactured by means of a hot calender process under rigorous quality control standards which are registered under ISO 9001 certification.

Application / service:

Style NA-1005 is indicated for air, brine, water, low pressure steam, organic and weak inorganic acids, diluted and concentrated alkalis, petroleum derivatives, synthetic and vegetable oils, aliphatic and chlorinated solvents, refrigerants, gases and chemical products in general.

Typical physical properties NA-1005

ASME test	Properties	Values
F 36	Compressibility	7-17 %
F 36	Recovery	45 %
F 146	Weight increase:	
	5h/ASTM oil/Nr.3 @ + 150°C	15 %
	5h/ASTM Fuel B @ +21-29°C	15 %
F 146	Thickness increase:	
	5h/ASTM oil/Nr. 3 @ +150°C	12%
	5h/ASTM Fuel B @ +21-29°C	10 %
F 152	Tensile strength, transverse	11,5 N/mm ²
DIN 52913	Residual Stress	28 N/mm ²
F 38	Creep relaxation	25%
F 37 A	Sealability at 1000 psi	0,25 ml/h
-	Density	app. 1,75 g/cm ³

Product standard:

- Thickness: 0.5 / 1.0 / 1.5 / 2.0 / 2.5 and 3.0 mm
- Sheet size: 1.500 x 1.600 mm, 1.500 x 3.200 mm


Technical data:

- Peak temperature: + 400°C
- Constant temperature: + 240°C
- Peak pressure: up to 110 bar
- Constant working pressure: 50 bar
- Colour: blue


TEADIT INTERNATIONAL
 Rosenheimer Str. 10
 6330 Kufstein
 Tel.: +43-5372-64020-0
 Fax: +43-5372-64020-20
 austria@teadit.eu

TEADIT DEUTSCHLAND GmbH
 Chemiepark G7/Raum 220
 51368 Leverkusen
 Tel.: +49-214-3023879
 Fax.: +49-214-3023893
 germany@teadit.eu

TEADIT ITALIA S.p.A.
 Via Vanzago 13
 25030 Paratico (BS)
 Tel.: +39-035-924911
 Fax: +39-035-913060
 italy@teadit.eu

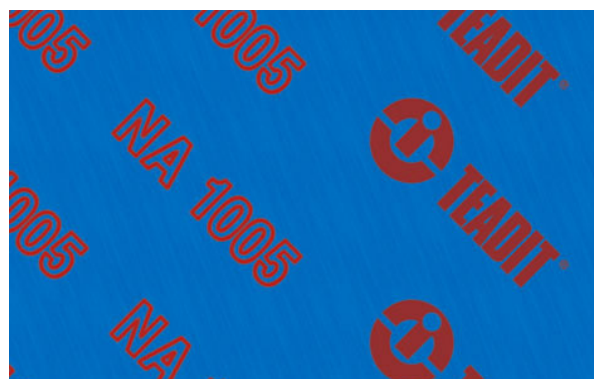

The P x T diagram above indicates the service limits for NA-1005 considering the simultaneous influence of pressure and temperature (chemical suitability assumed). The green area represents the normal service limits, while the orange coloured area shows the maximum application limits. For those cases, please consult our technical department.

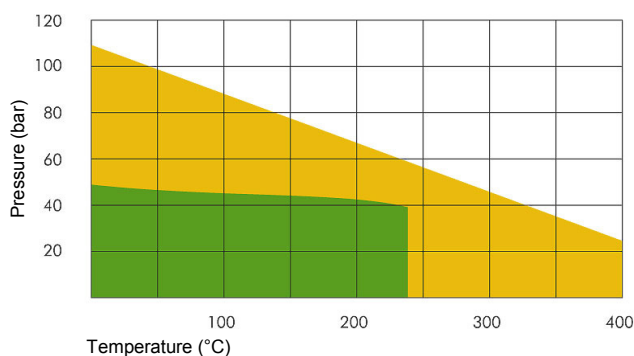

Approvals:

- Germanischer Lloyd Approval

NO WAY THROUGH

